

Brocade Vyatta Network OS Bridging Configuration Guide, 5.2R1

Supporting Brocade 5600 vRouter, VNF Platform, and Distributed
Services Platform

© 2016, Brocade Communications Systems, Inc. All Rights Reserved.

Brocade, the B-wing symbol, and MyBrocade are registered trademarks of Brocade Communications Systems, Inc., in the United States and in other countries. Other brands, product names, or service names mentioned of Brocade Communications Systems, Inc. are listed at www.brocade.com/en/legal/brocade-Legal-intellectual-property/brocade-legal-trademarks.html. Other marks may belong to third parties.

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by Brocade. Brocade reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Contact a Brocade sales office for information on feature and product availability. Export of technical data contained in this document may require an export license from the United States government.

The authors and Brocade Communications Systems, Inc. assume no liability or responsibility to any person or entity with respect to the accuracy of this document or any loss, cost, liability, or damages arising from the information contained herein or the computer programs that accompany it.

The product described by this document may contain open source software covered by the GNU General Public License or other open source license agreements. To find out which open source software is included in Brocade products, view the licensing terms applicable to the open source software, and obtain a copy of the programming source code, please visit <http://www.brocade.com/support/oscd>.

Contents

Preface	5
Document conventions.....	5
Notes, cautions, and warnings.....	5
Text formatting conventions.....	5
Command syntax conventions.....	6
Brocade resources.....	6
Document feedback.....	6
Contacting Brocade Technical Support.....	7
Brocade customers.....	7
Brocade OEM customers.....	7
About This Guide	9
Bridging Overview	11
Layer 2 bridging.....	11
MTU for bridge groups.....	11
Spanning Tree Protocol.....	11
Bridging Configuration Examples	15
Basic bridging configuration.....	15
Configuring bridge ports.....	16
Bridge Group Commands	19
Related bridge group commands.....	19
clear bridge <brx> macs.....	21
clear bridge <brx> macs mac-address <mac-address>.....	22
clear bridge <brx> macs port <port>.....	23
clear bridge <brx> macs port <port> mac-address <mac-address>.....	24
interfaces bridge <brx>.....	25
interfaces bridge <brx> address <address>.....	26
interfaces bridge <brx> aging.....	27
interfaces bridge <brx> description <desc>.....	28
interfaces bridge <brx> disable.....	29
interfaces bridge <brx> disable-link-detect.....	30
interfaces bridge <brx> ipv6 address.....	31
interfaces bridge <brx> ipv6 disable-forwarding.....	32
interfaces bridge <brx> ipv6 dup-addr-detect-transmits <num>.....	33
interfaces bridge <brx> ipv6 router-advert.....	34
interfaces bridge <brx> mac <mac-addr>.....	37
interfaces bridge <brx> spanning-tree.....	38
interfaces bridge <brx> spanning-tree forwarding-delay <delay>.....	39
interfaces bridge <brx> spanning-tree hello-time <interval>.....	41
interfaces bridge <brx> spanning-tree max-age <interval>.....	42
interfaces bridge <brx> spanning-tree priority <priority>.....	44
interfaces bridge <brx> spanning-tree tx-hold-count <count>.....	45
interfaces bridge <brx> spanning-tree version <stp rstp>.....	46
monitor interfaces bridge <brx>.....	47
show bridge.....	48

show bridge <brx> macs.....	49
show bridge <brx> macs mac-address <mac-address>.....	50
show bridge <brx> macs port <port>.....	51
show bridge <brx> macs port <port> mac-address <mac-address>.....	52
show bridge <brx> spanning-tree <brief>.....	53
show bridge <brx> spanning-tree bridge <brief>.....	55
show bridge <brx> spanning-tree port <port>.....	57
Bridge Interface Commands.....	59
clear interfaces bridge counters.....	60
interfaces dataplane <interface-name> bridge-group.....	61
interfaces dataplane <interface> vif <vif-id> bridge-group.....	63
show interfaces bridge.....	65
monitor interfaces bridge <brx>.....	66
Supported Interface Types.....	67
List of Acronyms.....	69

Preface

- Document conventions..... 5
- Brocade resources..... 6
- Document feedback..... 6
- Contacting Brocade Technical Support..... 7

Document conventions

The document conventions describe text formatting conventions, command syntax conventions, and important notice formats used in Brocade technical documentation.

Notes, cautions, and warnings

Notes, cautions, and warning statements may be used in this document. They are listed in the order of increasing severity of potential hazards.

NOTE

A Note provides a tip, guidance, or advice, emphasizes important information, or provides a reference to related information.

ATTENTION

An Attention statement indicates a stronger note, for example, to alert you when traffic might be interrupted or the device might reboot.



CAUTION

A Caution statement alerts you to situations that can be potentially hazardous to you or cause damage to hardware, firmware, software, or data.



DANGER

A Danger statement indicates conditions or situations that can be potentially lethal or extremely hazardous to you. Safety labels are also attached directly to products to warn of these conditions or situations.

Text formatting conventions

Text formatting conventions such as boldface, italic, or Courier font may be used to highlight specific words or phrases.

Format	Description
bold text	Identifies command names. Identifies keywords and operands. Identifies the names of GUI elements. Identifies text to enter in the GUI.
<i>italic text</i>	Identifies emphasis. Identifies variables. Identifies document titles.
Courier font	Identifies CLI output. Identifies command syntax examples.

Command syntax conventions

Bold and italic text identify command syntax components. Delimiters and operators define groupings of parameters and their logical relationships.

Convention	Description
bold text	Identifies command names, keywords, and command options.
<i>italic text</i>	Identifies a variable.
value	In Fibre Channel products, a fixed value provided as input to a command option is printed in plain text, for example, --show WWN.
[]	Syntax components displayed within square brackets are optional. Default responses to system prompts are enclosed in square brackets.
{ x y z }	A choice of required parameters is enclosed in curly brackets separated by vertical bars. You must select one of the options. In Fibre Channel products, square brackets may be used instead for this purpose.
x y	A vertical bar separates mutually exclusive elements.
< >	Nonprinting characters, for example, passwords, are enclosed in angle brackets.
...	Repeat the previous element, for example, <i>member[member...]</i> .
\	Indicates a "soft" line break in command examples. If a backslash separates two lines of a command input, enter the entire command at the prompt without the backslash.

Brocade resources

Visit the Brocade website to locate related documentation for your product and additional Brocade resources.

White papers, data sheets, and the most recent versions of Brocade software and hardware manuals are available at www.brocade.com.

Product documentation for all supported releases is available to registered users at MyBrocade.

Click the **Support** tab and select **Document Library** to access documentation on MyBrocade or www.brocade.com. You can locate documentation by product or by operating system.

Release notes are bundled with software downloads on MyBrocade. Links to software downloads are available on the MyBrocade landing page and in the Document Library.

Document feedback

Quality is our first concern at Brocade, and we have made every effort to ensure the accuracy and completeness of this document. However, if you find an error or an omission, or you think that a topic needs further development, we want to hear from you. You can provide feedback in two ways:

- Through the online feedback form in the HTML documents posted on www.brocade.com
- By sending your feedback to documentation@brocade.com

Provide the publication title, part number, and as much detail as possible, including the topic heading and page number if applicable, as well as your suggestions for improvement.

Contacting Brocade Technical Support

As a Brocade customer, you can contact Brocade Technical Support 24x7 online, by telephone, or by e-mail. Brocade OEM customers should contact their OEM/solution provider.

Brocade customers

For product support information and the latest information on contacting the Technical Assistance Center, go to www.brocade.com and select **Support**.

If you have purchased Brocade product support directly from Brocade, use one of the following methods to contact the Brocade Technical Assistance Center 24x7.

Online	Telephone	E-mail
<p>Preferred method of contact for non-urgent issues:</p> <ul style="list-style-type: none"> Case management through the MyBrocade portal. Quick Access links to Knowledge Base, Community, Document Library, Software Downloads and Licensing tools 	<p>Required for Sev 1-Critical and Sev 2-High issues:</p> <ul style="list-style-type: none"> Continental US: 1-800-752-8061 Europe, Middle East, Africa, and Asia Pacific: +800-AT FIBREE (+800 28 34 27 33) Toll-free numbers are available in many countries. For areas unable to access a toll-free number: +1-408-333-6061 	<p>support@brocade.com</p> <p>Please include:</p> <ul style="list-style-type: none"> Problem summary Serial number Installation details Environment description

Brocade OEM customers

If you have purchased Brocade product support from a Brocade OEM/solution provider, contact your OEM/solution provider for all of your product support needs.

- OEM/solution providers are trained and certified by Brocade to support Brocade® products.
- Brocade provides backline support for issues that cannot be resolved by the OEM/solution provider.
- Brocade Supplemental Support augments your existing OEM support contract, providing direct access to Brocade expertise. For more information, contact Brocade or your OEM.
- For questions regarding service levels and response times, contact your OEM/solution provider.

About This Guide

This guide describes how to configure Layer 2 bridging on Brocade products that run on the Brocade Vyatta Network OS (referred to as a virtual router, vRouter, or router in the guide).

Bridging Overview

- Layer 2 bridging..... 11
- MTU for bridge groups..... 11
- Spanning Tree Protocol..... 11

Layer 2 bridging

Bridging allows you to connect multiple network segments (typically LAN segments) at the Layer 2 level.

Since bridging occurs at Layer 2 (the data link layer) and IP addresses are relevant only on Layer 3 (the network layer), IP addresses are not allowed on the interfaces being bridged.

To create a bridge:

1. Create the bridge group. You create a bridge group by defining a bridge interface and setting its characteristics.
2. Add the interfaces to the bridge group. You do this within the configuration node for the interface itself.

The following interface types can be added directly to bridge groups:

- Physical data plane interfaces
- VLAN interfaces

MTU for bridge groups

The effective maximum transmission unit (MTU) size for a bridge group is the minimum MTU of all the interfaces that belong to the bridge group. So, the maximum frame size of frames transmitted by the bridged interfaces will be this effective MTU size.

Spanning Tree Protocol

Spanning Tree Protocol (STP) is a network protocol that ensures a loop-free topology for Ethernet networks. The basic function of STP is to prevent bridge loops. Spanning tree also allows a network design to include redundant links to provide automatic backup paths if an active link fails, thus, eliminating the need to manually enable or disable the backup links.

Brocade 5600 vRouter supports Rapid Spanning Tree Protocol (RSTP) that is an enhancement of the STP and provides the following advantages.

- Rapid convergence—Convergence in a standard STP network can take 30 to 50 seconds. The transition of a port to the forwarding state is passive and is based on various timers that are timing out. RSTP provides significantly faster spanning tree convergence after the topology changes by introducing new convergence behaviors and bridge port roles. RSTP responds to topology changes within 3 x hello times (default 3 x 2 seconds) or within a few milliseconds of a physical link failure.
- 802.1D legacy interoperability—RSTP interoperates fully with older STP switches. Although the introduction of a 802.1D STP switch means that the network loses its fast convergence benefit, the network is still able to run in a loop-free topology because RSTP interoperates with STP. Typically, a network is designed with all-RSTP bridges, but the backward compatibility ensures that the accidental introduction of an old STP bridge does not cause an outage.

The difference between the STP and RSTP spanning tree versions follow.

TABLE 1 Difference between the STP and RSTP versions

STP	RSTP
In a stable topology, only the root sends Bridge Protocol Data Units (BPDU)s that are relayed by others.	In a stable topology, all bridges generate BPDUs every hello interval (2 seconds). These are used as keep-alive mechanisms.
The following port states are supported: <ul style="list-style-type: none"> • Disabled • Blocking • Listening • Learning • Forwarding 	The following port states are supported: <ul style="list-style-type: none"> • Disabled • Discarding • Learning • Forwarding <p>Blocking and listening states are replaced with discarding state. The disabled state is not a part of the Rapid STP specification, but is used when the vRouter interface is set to the down state.</p>
The following port roles are supported: <ul style="list-style-type: none"> • Root (Forwarding) • Designated (Forwarding) • Blocking <p>The port that receives the best BPDU on a bridge, is the root port, that is, the port closest to the root bridge in terms of path cost.</p> <p>A port is a designated port if it can send the best BPDU on the segment to which it is connected. On a given segment, there can be only one path toward the root bridge.</p> <p>A blocking port is defined as not being the designated or root port.</p>	The following port roles are supported: <ul style="list-style-type: none"> • Root (Forwarding) • Designated (Forwarding) • Alternate (Discarding) • Backup (Discarding) <p>The blocking port role is split into the backup and alternate port roles.</p> <p>A port is a designated port if it can send the best BPDU on the segment to which it is connected. On a given segment, there can only be one path towards the root bridge.</p> <p>An alternate port is a port that receives more useful BPDUs from another bridge and is a blocked port.</p> <p>A backup port receives more useful BPDUs from the same bridge that it is on and is a blocked port.</p>
STP uses the following timers for convergence (advertised by the root bridge): <ul style="list-style-type: none"> • Hello—2 seconds • Max Age—20 seconds (10 missed hellos) • Forward Delay—15 seconds 	The proposal-and-agreement process for synchronization is less than 1 second.
Slow transition that is 50 seconds, which is as follows: <ul style="list-style-type: none"> • Blocking (20 seconds) • Listening (15 seconds) • Learning (15 seconds) • Forwarding 	Hello, max age, and forward delay timers are used only for backward compatibility with standard STP.
Uses only two bits in the BPDU flag octet. <ul style="list-style-type: none"> • Bit 7—Topology Change Acknowledgement (TCA) Bit • Bit 0—Topology Change 	Only RSTP port receiving STP (802.1d) messages behave as standard STP.
Uses only two bits in the BPDU flag octet. <ul style="list-style-type: none"> • Bit 7—Topology Change Acknowledgement (TCA) Bit • Bit 0—Topology Change 	Faster transition on point-to-point and edge ports only. There are fewer states and no learning state. RSTP actively looks for possible failure by Request Link Query (RLQ), a feedback mechanism.
Uses other six bits of the flag octet (for BPDU type 2 or version 2): <ul style="list-style-type: none"> • Bit 1: Proposal bit • Bits 2 and 3 : Port role bit • Bit 4 : Learning bit • Bit 5 : Forwarding bit • Bit 6 : Agreement bit • Bits 0 and 7 : TCA and TCN for backward compatibility 	Uses other six bits of the flag octet (for BPDU type 2 or version 2): <ul style="list-style-type: none"> • Bit 1: Proposal bit • Bits 2 and 3 : Port role bit • Bit 4 : Learning bit • Bit 5 : Forwarding bit • Bit 6 : Agreement bit • Bits 0 and 7 : TCA and TCN for backward compatibility
The bridge that discovers a change in the network informs the root, which in turn informs all others by sending BPDUs with the TCA bit set and instructs them to clear their data base entries after the short timer (~Forward delay) expires.	A topology Change (TC) is flooded through the network, every bridge generates a TC and informs its neighbors when it is aware of a TC and immediately deletes old data base entries.

TABLE 1 Difference between the STP and RSTP versions (continued)

STP	RSTP
If a nonroot bridge does not receive a hello for a max-age interval of time on a root port, the STP starts claiming the root role by generating its own BPDU.	Waits for 3 times the hello on a root port before deciding to act.

Bridging Configuration Examples

- [Basic bridging configuration.....](#) 15
- [Configuring bridge ports.....](#) 16

Basic bridging configuration

This section presents a sample configuration for a basic bridge between two Ethernet segments on a Brocade vRouter.

NOTE


For information on bridging with GRE tunnels, see *Brocade Vyatta Network OS Tunnels Configuration Guide*.

NOTE

In the vRouter, a data plane interface is an abstraction that represents the underlying physical or virtual Ethernet interface of the system. The terms Ethernet interface and data plane interface are synonymous in this guide.

When you have finished, the system will be configured as shown in the following figure.

FIGURE 1 Basic bridging

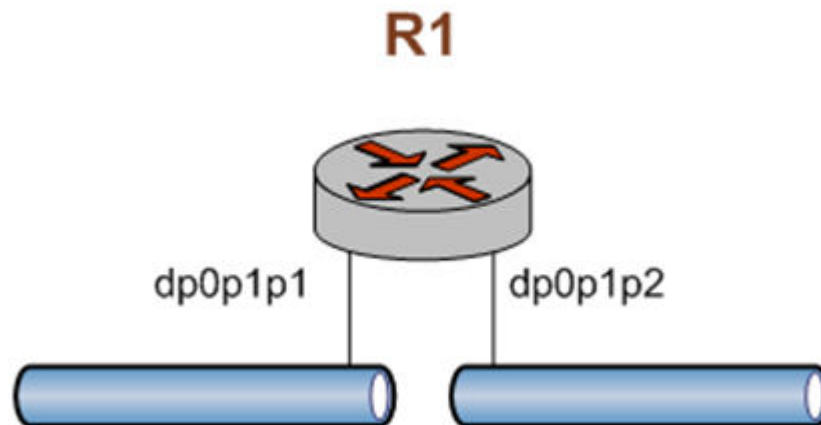

In this example, you create a bridge interface and assign the data plane interfaces to the bridge group.

Table 2 creates the bridge interface and adds the data plane interfaces to the bridge group. To do this, perform the following steps on R1 in configuration mode.

TABLE 2 Configuring a bridge between two data plane interfaces

Step	Command
Create the bridge interface.	<code>vyatta@R1# set interfaces bridge br0</code>
Add the dp0p1p1 interface to the bridge group.	<code>vyatta@R1# set interfaces dataplane dp0p1p1 bridge-group bridge br0</code>
Add the dp0p1p2 interface to the bridge group.	<code>vyatta@R1# set interfaces dataplane dp0p1p2 bridge-group bridge br0</code>

TABLE 2 Configuring a bridge between two data plane interfaces (continued)

Step	Command
Commit the configuration.	<code>vyatta@R1# commit</code>
View the configuration.	<pre>vyatta@R1# show interfaces bridge br0 dataplane dp0p1p1 { bridge-group { bridge br0 } } dataplane dp0p1p2 { bridge-group { bridge br0 } } }</pre>

Configuring bridge ports


This section provides a sample configuration for two bridges between Ethernet segments on two Brocade vRouters.

NOTE

In the vRouter, a data plane interface is an abstraction that represents the underlying physical or virtual Ethernet interface of the system. The terms Ethernet interface and data plane interface are synonymous in this guide.

The following example shows two main types of bridge port configurations: a bridge-to-bridge port and an edge port. The same configuration applies to both bridges.

FIGURE 2 Configuring bridge ports

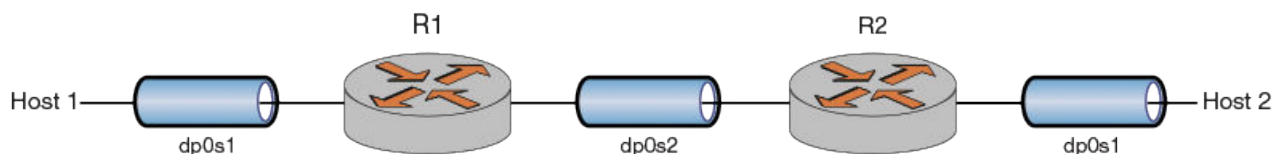

Ports are configured as edge ports if they are attached to a LAN that has no other bridges attached. These edge ports transition directly to the forwarding state. RSTP still continues to monitor the port for BPDUs if a bridge is connected. RSTP can also be configured to automatically detect edge ports. As soon as the bridge detects a BPDU coming to an edge port, the port becomes a nonedge port.

When you have finished, the system is configured as shown in the following figure.

Table 3 shows how to create the bridge interface and add the data plane interfaces and port configurations to both bridge groups.

To do this, perform the following steps on both R1 and R2 in configuration mode.

TABLE 3 Configuring bridge ports

Step	Command
Create the bridge interface.	<code>vyatta@R1# set interfaces bridge br0</code>
Enable spanning tree.	<code>vyatta@R1# set interfaces bridge br0 spanning-tree</code>

TABLE 3 Configuring bridge ports (continued)

Step	Command
Add dp0s1 and dp0s2 interfaces to the bridge.	<pre>vyatta@R1# set interfaces dataplane dp0s1 bridge-group bridge br0 vyatta@R1# set interfaces dataplane dp0s2 bridge-group bridge br0</pre>
Configure host-facing interfaces as edge ports.	<pre>vyatta@R1# set interfaces dataplane dp0s1 bridge-group admin-edge vyatta@R1# set interfaces dataplane dp0s1 bridge-group auto-edge</pre>
Commit the configuration.	<pre>vyatta@R1# commit</pre>
Use the show brief command to verify the following configurations. <ul style="list-style-type: none"> The bridge-to-bridge port is of point-to-point type. The host-facing port is of edge type . Both ports are RSTP version. 	<pre>vyatta@R1:~\$ show bridge br0 spanning-tree brief Bridge br0 Designated Root 8.000.52:54:00:00:01:01 Designated Root Cost 1000 Designated Root Port dp0s2 (2) Bridge ID 8.000.52:54:00:00:02:02 Port State Role Cost Prio Type Ver dp0s1 (1) forwarding Desg 2000 8 edge rstp dp0s2 (2) forwarding Root 1000 8 p2p rstp</pre>

Bridge Group Commands

- Related bridge group commands..... 19
- clear bridge <brx> macs..... 21
- clear bridge <brx> macs mac-address <mac-address>..... 22
- clear bridge <brx> macs port <port>..... 23
- clear bridge <brx> macs port <port> mac-address <mac-address>..... 24
- interfaces bridge <brx>..... 25
- interfaces bridge <brx> address <address>..... 26
- interfaces bridge <brx> aging..... 27
- interfaces bridge <brx> description <desc>..... 28
- interfaces bridge <brx> disable..... 29
- interfaces bridge <brx> disable-link-detect..... 30
- interfaces bridge <brx> ipv6 address..... 31
- interfaces bridge <brx> ipv6 disable-forwarding..... 32
- interfaces bridge <brx> ipv6 dup-addr-detect-transmits <num>..... 33
- interfaces bridge <brx> ipv6 router-advert..... 34
- interfaces bridge <brx> mac <mac-addr>..... 37
- interfaces bridge <brx> spanning-tree..... 38
- interfaces bridge <brx> spanning-tree forwarding-delay <delay>..... 39
- interfaces bridge <brx> spanning-tree hello-time <interval>..... 41
- interfaces bridge <brx> spanning-tree max-age <interval>..... 42
- interfaces bridge <brx> spanning-tree priority <priority>..... 44
- interfaces bridge <brx> spanning-tree tx-hold-count <count>..... 45
- interfaces bridge <brx> spanning-tree version <stp | rstp>..... 46
- monitor interfaces bridge <brx>..... 47
- show bridge..... 48
- show bridge <brx> macs..... 49
- show bridge <brx> macs mac-address <mac-address>..... 50
- show bridge <brx> macs port <port>..... 51
- show bridge <brx> macs port <port> mac-address <mac-address>..... 52
- show bridge <brx> spanning-tree <brief>..... 53
- show bridge <brx> spanning-tree bridge <brief>..... 55
- show bridge <brx> spanning-tree port <port>..... 57

Related bridge group commands

This chapter lists the commands used to create the bridge group (the bridge interface) and define its characteristics.

Commands for using other system features with bridge groups can be found in the following locations.

Related Commands Documented Elsewhere	
ARP commands	ARP is supported by bridge interfaces. Commands for working with ARP are described in <i>Brocade Vyatta Network OS Basic System Configuration Guide</i> .
DHCP commands	DHCP is supported by bridge groups. For DHCP-related commands, refer to <i>Brocade Vyatta Network OS Services Configuration Guide</i> .
Firewall	Firewall is supported by bridge groups. Commands for configuring firewall are described in <i>Brocade Vyatta Network OS Firewall Configuration Guide</i> .
Policy-based routing	Policy-based routing is supported by bridge groups. Commands for configuring policy-based routing are described in <i>Brocade Vyatta Network OS Policy-based Routing Configuration Guide</i> .

Related Commands Documented Elsewhere	
OSPF	OSPF is supported by bridge groups. Commands for configuring OSPF are described in <i>Brocade Vyatta Network OS OSPF Configuration Guide</i> .
QoS	Quality-of-service (QoS) traffic policies are supported by bridge groups. Commands for configuring QoS are described in <i>Brocade Vyatta Network OS QoS Configuration Guide</i> .
RIP	RIP is supported by bridge groups. Commands for configuring RIP are described in <i>Brocade Vyatta Network OS RIP Configuration Guide</i> .
RIPng	RIPng is supported by bridge groups. Commands for configuring RIPng are described in <i>Brocade Vyatta Network OS RIPng Configuration Guide</i> .

clear bridge <brx> macs

Clears the FDB for bridge MAC address for a bridge group.

Syntax

```
clear bridge brx macs
```

Parameters

brx

The ID of a bridge group.

Modes

Operational mode

Usage Guidelines

Use this command to clear the forwarding database (FDB) for bridge MAC address for a bridge group.

NOTE

After clearing the FDB for bridge MAC address, a short period of unicast-packet flooding may last until the source MAC addresses are relearned.

```
clear bridge <brx> macs mac-address <mac-address>
```

clear bridge <brx> macs mac-address <mac-address>

Clears from the FDB for bridge MAC address the record that matches the MAC address.

Syntax

```
clear bridge brx macs mac-address mac-address
```

Parameters

brx

The ID of a bridge group.

mac-address

A MAC address for which information is to be cleared from the database. The format of the address is *hh:hh:hh:hh:hh:hh*, where *h* is a hexadecimal number.

Modes

Operational mode

Usage Guidelines

Use this command to clear from the FDB for bridge MAC address the record that matches the MAC address.

clear bridge <brx> macs port <port>

Clears from the FDB for bridge MAC address entries that match a bridge interface port.

Syntax

```
clear bridge brx macs port port
```

Parameters

brx

The ID of a bridge group.

port

A port for which information is cleared from the database.

Modes

Operational mode

Usage Guidelines

Use this command to clear from the FDB for bridge MAC address entries that match a bridge interface port.

clear bridge <brx> macs port <port> mac-address <mac-address>

clear bridge <brx> macs port <port> mac-address <mac-address>

Clears records from the FDB for bridge MAC address entries of a bridge port that matches with the MAC address.

Syntax

clear bridge *brx* macs port *port* mac-address *mac-address*

Parameters

brx

The ID of a bridge group.

mac-address

A MAC address for which information is cleared from the database. The format of the address is *hh:hh:hh:hh:hh:hh*, where *h* is a hexadecimal number.

port

A port for which information is cleared from the FDB for bridge MAC address.

Modes

Operational mode

Usage Guidelines

Use this command to clear records from the FDB for bridge MAC address entries of a bridge port that matches with the MAC address.

interfaces bridge <brx>

Defines a bridge group.

Syntax

set interfaces bridge *brx*

delete interfaces bridge *brx*

show interfaces bridge *brx*

Parameters

brx

Multinode. The identifier for the bridge group. The identifier ranges from **br0** through **brxxxxxxxxxxxx** (the letters **br** followed by as many as 13 decimal digits, each digit represented here as an *x*).

You can define multiple bridge groups by creating more than one **bridge** configuration node.

Modes

Configuration mode

Configuration Statement

```
interfaces {  
    bridge brx  
}
```

Usage Guidelines

Use this command to define a bridge group. Note that you must create the bridge group (using this command) before you can assign interfaces to it.

Use the **set** form of this command to create the bridge group and define bridge settings.

Use the **delete** form of this command to remove all configuration for a bridge group.

Use the **show** form of this command to view bridge group configuration.

interfaces bridge <brx> address <address>

interfaces bridge <brx> address <address>

Assigns an address to a bridge group.

Syntax

set interfaces bridge *brx* address *address*

delete interfaces bridge *brx* address *address*

show interfaces bridge *brx* address

Parameters

brx

Bridge group ID.

address

Multi-node. The IP address and network prefix for the interface. The address must either be in the form *ip-address/prefix*, or the keywords **dhcp** or **dhcpv6**. If **dhcp** is specified, an IPv4 address and network prefix is assigned using the Dynamic Host Configuration Protocol (DHCP). If **dhcpv6** is specified, an IPv6 address and network prefix are set using the DHCP for IPv6 (DHCPv6).

You can assign multiple addresses to a bridge group by creating multiple **address** configuration nodes.

Modes

Configuration mode

Configuration Statement

```
interfaces {  
    bridge brx {  
        address address  
    }  
}
```

Usage Guidelines

Use this command to assign an address to a bridge group.

Use the **set** form of this command to set the address for the bridge group.

Use the **delete** form of this command to remove address configuration for the bridge group

Use the **show** form of this command to view bridge group address configuration.

interfaces bridge <brx> aging

Specifies the MAC address aging timeout for a bridge group.

Syntax

set interfaces bridge *brx* aging { *age* | 0 }

delete interfaces bridge *brx* aging

show interfaces bridge *brx* aging

Command Default

MAC addresses are aged out of the forwarding database after 300 seconds (5 minutes).

Parameters

brx

Bridge group ID.

aging { *age* | 0 }

Specifies the length of time, in seconds, that a MAC address is to be kept before being aged out. The range is 10 through 1,000,000. The default value is 300 seconds. Specifying an **aging** value of **0** means that a MAC address is kept forever.

Modes

Configuration mode

Configuration Statement

```
interfaces {
  bridge brx {
    aging age
  }
}
```

Usage Guidelines

Use this command to specify the length of time that a dynamic MAC address entry is kept in a bridge's forwarding database. If this interval expires without the entry being updated, the entry is aged out of the table.

Use the **set** form of this command to set the MAC address aging timeout value.

Use the **delete** form of this command to restore the default MAC address aging configuration.

Use the **show** form of this command to view the MAC address aging configuration.

interfaces bridge <brx> description <desc>

interfaces bridge <brx> description <desc>

Specifies a description for a bridge group.

Syntax

set interfaces bridge *brx* description *desc*

delete interfaces bridge *brx* description

show interfaces bridge *brx* description

Parameters

brx

Bridge group ID.

desc

A brief description for the bridge group.

Modes

Configuration mode

Configuration Statement

```
interfaces {
  bridge brx {
    description desc
  }
}
```

Usage Guidelines

Use this command to specify a description for the bridge group.

Use the **set** form of this command to specify a description for the bridge group.

Use the **delete** form of this command to remove the bridge group description.

Use the **show** form of this command to view the bridge group description.

interfaces bridge <brx> disable

Disables a bridge group without discarding configuration.

Syntax

set interfaces bridge *brx* disable

delete interfaces bridge *brx* disable

show interfaces bridge *brx*

Command Default

Bridging is enabled.

Parameters

brx

Bridge group ID.

Modes

Configuration mode

Configuration Statement

```
interfaces {  
  bridge brx {  
    disable  
  }  
}
```

Usage Guidelines

Use this command to disable a bridge group.

Use the **set** form of this command to specify whether to disable bridging on the interface.

Use the **delete** form of this command to restore the default value for the bridge group.

Use the **show** form of this command to view bridge group configuration.

interfaces bridge <brx> disable-link-detect

Directs the bridge interface not to detect changes in link-states.

Syntax

set interfaces bridge *brx* disable-link-detect

delete interfaces bridge *brx* disable-link-detect

show interfaces bridge *brx*

Command Default

Detects changes in link-states.

Parameters

brx

Bridge group ID.

Modes

Configuration mode.

Configuration Statement

```
interfaces {  
  bridge brx {  
    disable-link-detect  
  }  
}
```

Usage Guidelines

Use this command to disable a bridge group.

Use the **set** form of this command to specify whether to ignore changes in link-states.

Use the **delete** form of this command to detect changes in link-states.

Use the **show** form of this command to view bridge group configuration.

interfaces bridge <brx> ipv6 address

Assigns an IPv6 address to a bridge interface.

Syntax

```
set interfaces bridge brx ipv6 address [autoconf | eui64 ipv6prefix]
delete interfaces bridge brx ipv6 address [autoconf | eui64 ipv6prefix]
show interfaces bridge brx ipv6 address [autoconf | eui64]
```

Parameters

brx

Bridge group ID.

autoconf

Generates an IPv6 address using the Stateless Address Autoconfiguration (SLAAC) protocol. Set this value if the interface is performing a “host” function rather than a “router” function. This value can be specified in addition to specifying static IPv6, static IPv4, or IPv4 DHCP addresses on the interface.

ipv6prefix

The 64-bit IPv6 address prefix used to configure an IPv6 address, in EUI-64 format. The system concatenates this prefix with a 64-bit EUI-64 value derived from the 48-bit MAC address of the interface.

Modes

Configuration mode

Configuration Statement

```
interfaces bridge brx {
  ipv6 {
    address {
      autoconf
      eui64 ipv6prefix
    }
  }
}
```

Usage Guidelines

Use this command to assign an IPv6 address to an interface.

You can use the **autoconf** keyword to direct the system to autoconfigure the address, using the SLAAC protocol defined in RFC 4862. Alternatively, you can provide an EUI-64 IPv6 address prefix so that the system constructs the IPv6 address.

If you want the system to use SLAAC to acquire addresses on this interface, then in addition to setting this parameter, you must also disable IPv6 forwarding, either globally (using the **system ipv6 disable-forwarding** command) or specifically on this interface (using the [interfaces bridge *brx* ipv6 disable-forwarding](#) on page 32 command).

Use the **set** form of this command to specify an IPv6 address for the interface.

Use the **delete** form of this command to delete an IPv6 address from the interface.

Use the **show** form of this command to view IPv6 address configuration settings.

interfaces bridge <brx> ipv6 disable-forwarding

Disables IPv6 forwarding on a bridge interface.

Syntax

```
set interfaces bridge brx ipv6 disable-forwarding
delete interfaces bridge brx ipv6 disable-forwarding
show interfaces bridge brx ipv6 disable-forwarding
```

Command Default

IPv6 packets are forwarded.

Parameters

brx
Bridge group ID.

Modes

Configuration mode

Configuration Statement

```
interfaces bridge brx {
  ipv6 {
    disable-forwarding
  }
}
```

Usage Guidelines

Use this command to disable IPv6 packet forwarding on an interface.

You can also disable IPv6 forwarding globally (that is, for all interfaces) using the **system ipv6 disable-forwarding** command.

Use the **set** form of this command to disable IPv6 packet forwarding on an interface.

Use the **delete** form of this command to enable IPv6 packet forwarding on an interface.

Use the **show** form of this command to display IPv6 packet forwarding interface configuration.

interfaces bridge <brx> ipv6 dup-addr-detect-transmits <num>

Specifies the number of times to transmit NS packets as part of the DAD process.

Syntax

set interfaces bridge *brx* ipv6 dup-addr-detect-transmits *num*

delete interfaces bridge *brx* ipv6 dup-addr-detect-transmits

show interfaces bridge *brx* ipv6 dup-addr-detect-transmits

Command Default

One NS packet is transmitted as part of the DAD process.

Parameters

brx

Bridge group ID.

num

The number of times to transmit NS packets as part of the DAD process. The default is 1.

Modes

Configuration mode

Configuration Statement

```
interfaces bridge brx {
    ipv6 {
        dup-addr-detect-transmits num
    }
}
```

Usage Guidelines

Use this command to specify the number of times to transmit Neighbor Solicitation (NS) packets as part of the Duplicate Address Detection (DAD) process.

Use the **set** form of this command to specify the number of times to transmit Neighbor Solicitation (NS) packets as part of the Duplicate Address Detection (DAD) process.

Use the **delete** form of this command to delete the parameter from the interface and use the default value.

Use the **show** form of this command to view NS packet configuration for DAD.

interfaces bridge <brx> ipv6 router-advert

Specifies the router advertisements to be sent from the bridge interface.

Syntax

set interfaces bridge *brx* **ipv6 router-advert** [**cur-hop-limit** *limit* | **default-lifetime** *lifetime* | **default-preference** *preference* | **link-mtu** *mtu* | **managed-flag** *state* | **max-interval** *interval* | **min-interval** *interval* | **other-config-flag** *state* | **prefix** *ipv6net* [**autonomous-flag** *state* | **on-link-flag** *state* | **preferred-lifetime** *lifetime* | **valid-lifetime** *lifetime*] | **reachable-time** *time* | **retrans-timer** *time* | **send-advert** *state*]

delete interfaces bridge *brx* **ipv6 router-advert** [**cur-hop-limit** | **default-lifetime** | **default-preference** | **link-mtu** | **managed-flag** | **max-interval** | **min-interval** | **other-config-flag** | **prefix** *ipv6net* [**autonomous-flag** | **on-link-flag** | **preferred-lifetime** | **valid-lifetime**] | **reachable-time** | **retrans-timer** | **send-advert**]

show interfaces bridge *brx* **ipv6 router-advert**

Command Default

Router advertisements are not sent on an interface.

Parameters

brx

Bridge group ID.

cur-hop-limit *limit*

Specifies the Hop Count field of the IP header for outgoing (unicast) IP packets. This value is placed in the Hop Count field of the IP header for outgoing (unicast) IP packets. The range is 0 to 255. The default is 64. A value of 0 means unspecified by the router.

default-lifetime *lifetime*

Specifies the lifetime, in seconds, associated with the default router. Supported values are 0, which indicates that the router is not a default router, and the range from the value is configured for the **max-interval** option to 9000 (18.2 hours). If not configured, the value for this timer is three times **max-interval**.

default-preference *preference*

The preference associated with the default router. Supported values are as follows: **low**: The default router is low preference. **medium**: The default router is medium preference. **high**: The default router is high preference. The default is **medium**.

link-mtu *mtu*

The MTU value to be advertised for the link. The range of values is 0, or 1280 to the maximum MTU for the type of link, as defined in RFC 2464. The default is 0, which means the MTU is not specified in the router advertisement message. That is because it is expected that the MTU will be configured directly on the interface itself and not for routing advertisements. You can configure this option in cases where the link MTU is not well known.

If the value set here does not match the MTU configured on the interface, the system issues a warning but does not fail.

managed-flag *state*

Whether to use the administered protocol for address autoconfiguration. Supported values are as follows: **true**: Hosts use the administered (stateful) protocol for address autoconfiguration in addition to any addresses autoconfigured

using stateless address autoconfiguration. **false**: Hosts use only stateless address autoconfiguration. The default is **false**.

max-interval *interval*

The maximum time, in seconds, allowed between sending unsolicited multicast router advertisements from the interface. The range of supported values is 4 to 1800.

The default is 600 (10 minutes).

min-interval *interval*

The minimum time, in seconds, allowed between sending unsolicited multicast router advertisements from the interface. The range of supported values is 3 to $0.75 * \text{max-interval}$. The default is $0.33 * \text{max-interval}$.

other-config-flag *state*

The interface uses the administered (stateful) protocol for autoconfiguration of non-address information, as defined in RFC 4862. Supported values are as follows: **true**: Hosts use the administered protocol for autoconfiguration of non-address information. **false**: Hosts use stateless autoconfiguration of non-address information. The default is **false**.

prefix *ipv6net*

Multi-node. The IPv6 prefix to be advertised on the IPv6 interface, in the format *ipv6-address/prefix*.

You can define more than one IPv6 prefix by configuring multiple **prefix** configuration nodes.

autonomous-flag *state*

Specifies whether the prefix can be used for autonomous address configuration as defined in RFC 4862. Supported values are as follows: **true**: The prefix can be used for autonomous address configuration. **false**: The prefix cannot be used for autonomous address configuration. The default is **true**.

on-link-flag *state*

Specifies whether the prefix can be used for on-link determination, as defined in RFC 4862. Supported values are as follows: **true**: The prefix can be used for on-link determination. **false**: The advertisement makes no statement about on-link or off-link properties of the prefix. For instance, the prefix might be used for address configuration with some addresses belonging to the prefix being on-link and others being off-link. The default is **true**.

preferred-lifetime *lifetime*

The length of time, in seconds, that the addresses generated from the prefix through Stateless Address Autoconfiguration (SLAAC) is to remain preferred, as defined in RFC 4862. The interval is with respect to the time the packet is sent. The range is 1 to 4294967296 plus the keyword **infinity**, which represents forever. (The actual value of **infinity** is a byte where all bits are set to ones: 0xFFFFFFFF.) The default is 604800 (seven days).

valid-lifetime *lifetime*

The length of time, in seconds, that the prefix is valid for the purpose of on-link determination, as defined in RFC 4862. The interval is with respect to the time the packet is sent. The range is 1 to 4294967296 plus the keyword **infinity**, which represents forever. (The actual value of **infinity** is a byte where all bits are set to ones: 0xFFFFFFFF.) The default is 2592000 (30 days).

reachable-time *time*

The length of time, in milliseconds, for which the system assumes a neighbor is reachable after having received a reachability confirmation. This value is used by address resolution and the Neighbor Unreachability Detection algorithm (see Section 7.3 of RFC 2461). The range is 0 to 3600000, where a value of 0 means the reachable time is not specified in the router advertisement message. The default is 0.

retrans-timer *time*

The length of time, in milliseconds, between retransmitted NS messages. This value is used by address resolution and the Neighbor Unreachability Detection algorithm (see Sections 7.2 and 7.3 of RFC 2461). The range of supported

values is 0 to 4294967295, where a value of 0 means the retransmit time is not specified in the router advertisement message. The default is 0.

send-advert state

Specifies whether router advertisements are to be sent from this interface. Supported values are as follows: **true**: Sends router advertisements from this interface. **false**: Does not send router advertisements from this interface. If this value is in effect, parameters in this configuration subtree are still used to configure the local implementation parameters. The default is **true**.

Modes

Configuration mode

Configuration Statement

```

interfaces bridge brx {
  ipv6 {
    router-advert {
      cur-hop-limit limit
      default-lifetime lifetime
      default-preference preference
      link-mtu mtu
      managed-flag state
      max-interval interval
      min-interval interval
      other-config-flag state
      prefix ipv6net {
        autonomous-flag state
        on-link-flag state
        preferred-lifetime lifetime
        valid-lifetime lifetime
      }
      reachable-time time
      retrans-timer time
      send-advert state
    }
  }
}

```

Usage Guidelines

Use this command to configure router advertisements (RAs) to be sent out of the interface being configured.

Router advertisements are sent out by IPv6 routers in order to advertise their existence to hosts on the network. IPv6 hosts do not send out router advertisements.

If the **router-advert** node of the configuration tree is missing, router advertisements are not sent out. Also, if IPv6 forwarding is disabled either globally (using the **system ipv6 disable-forwarding** command) or on the interface (using the [interfaces bridge brx ipv6 disable-forwarding](#) on page 32 command), router advertisements are not sent out.

Most router advertisement parameters are required by either the Neighbor Discovery (ND) protocol or the Stateless Address Autoconfiguration (SLAAC) protocol. These parameters are used both locally for the IPv6 implementation and become part of the RA messages sent to hosts on the network so that they can be configured appropriately.

Use the **set** form of this command to create the **router-advert** configuration node and begin to send router advertisements.

Use the **delete** form of this command to remove **router-advert** configuration node and stop sending router advertisements.

Use the **show** form of this command to view router advertisement configuration.

interfaces bridge <brx> mac <mac-addr>

Specifies the mac address of a bridge interface.

Syntax

set interfaces bridge *brx* **mac** *mac-addr*

delete interfaces bridge *brx* **mac**

show interfaces bridge *brx* **mac**

Parameters

brx

Bridge group ID.

mac-addr

The MAC address to be set for the bridge interface. The format should be appropriate for the interface type. For an Ethernet interface, this is six colon-separated 8-bit numbers in hexadecimal; for example, 00:0a:59:9a:f2:ba.

Modes

Configuration mode

Configuration Statement

```
interfaces {
  bridge brx {
    mac mac-addr
  }
}
```

Usage Guidelines

Use this command to set the media access control (MAC) address of the bridge interface. The MAC address for a bridge interface defaults to the MAC address of the lowest numbered data plane interface, that is a member of the bridge group. The bridge MAC address is the least significant part of the bridge ID. The bridge priority is the most significant part of the bridge ID. The bridge with the lowest numerical bridge ID is selected as the route bridge.

Use the **set** form of this command to set the MAC address of the bridge interface.

Use the **delete** form of this command to remove a configured MAC address for the bridge interface.

Use the **show** form of this command to view MAC address configuration for the bridge interface.

interfaces bridge <brx> spanning-tree

Enables spanning tree protocol on a bridge group.

Syntax

set interfaces bridge *brx* spanning-tree

delete interfaces bridge *brx* spanning-tree

show interfaces bridge *brx* spanning-tree

Command Default

Spanning tree protocol is disabled.

Parameters

brx

The ID of bridge group.

spanning-tree

Specifies the Spanning Tree Protocol.

Modes

Configuration mode

Configuration Statement

```
interfaces {  
    bridge brx {  
        spanning-tree  
    }  
}
```

Usage Guidelines

Use this command to enable the IEEE 802.1D Spanning Tree Protocol (STP) on a bridge group. When STP is enabled on a bridge group, it is enabled for all interfaces and vifs assigned to the bridge group.

Use the **set** form of this command to enable STP on a bridge group.

Use the **delete** form of this command to restore the default state of STP on a bridge group; that is, STP is disabled..

Use the **show** form of this command to view the STP configuration on a bridge group.

interfaces bridge <brx> spanning-tree forwarding-delay <delay>

Specifies the amount of time a bridge group spends in the listening and learning state after a topology change.

Syntax

set interfaces bridge *brx* spanning-tree forwarding-delay *delay*

delete interfaces bridge *brx* spanning-tree forwarding-delay

show interfaces bridge *brx* spanning-tree forwarding-delay

Command Default

The forwarding delay is 15 seconds.

Parameters

brx

The ID of a bridge group.

spanning-tree

Specifies spanning tree configuration.

forwarding-delay *delay*

Specifies the length of time, in seconds, that an STP bridge port spends in the listening and learning state, before changing to the forwarding state after a topology change. The delay time ranges from 4 through 30 seconds.

The default value is 15 seconds, that is, the bridge group spends 15 seconds in the listening state, where it listens for spanning tree bridge protocol data unit (BPDU) packets, before changing to the learning state. It then spends 15 seconds in the learning state where it learns the source MAC addresses of other devices on the network, before changing to the forwarding state.

NOTE

The **forwarding-delay** applies to ports in STP mode and RSTP ports that are neither edge ports nor point-to-point ports.

Modes

Configuration mode

Configuration Statement

```
interfaces {
  bridge brx {
    spanning-tree {
      forwarding-delay delay
    }
  }
}
```

interfaces bridge <brx> spanning-tree forwarding-delay <delay>

Usage Guidelines

NOTE

The configuration enforces the following relationship between the **forwarding-delay forwarding-delay** and **max-age** spanning tree protocol timers:

$$2 * (\text{forwarding-delay} - 1 \text{ second}) \geq \text{max-age}$$

Use the **set** form of this command to specify the length of time that the bridge spends in the listening and learning state after a topology change.

Use the **delete** form of this command to restore the default forwarding-delay configuration.

Use the **show** form of this command to view the forwarding-delay configuration.

interfaces bridge <brx> spanning-tree hello-time <interval>

Specifies the hello packet advertisement interval for a bridge group.

Syntax

set interfaces bridge *brx* spanning-tree hello-time *interval*

delete interfaces bridge *brx* spanning-tree hello-time

show interfaces bridge *brx* spanning-tree hello-time

Command Default

Hello packets are transmitted at two-second intervals.

Parameters

brx

Bridge group ID.

spanning-tree

Specifies spanning tree configuration.

hello-time*interval*

Specifies the hello packet advertisement interval in seconds. The range is 1 through 10. The default value is 2 seconds.

Modes

Configuration mode

Configuration Statement

```
interfaces {
  bridge brx {
    spanning-tree {
      hello-time interval
    }
  }
}
```

Usage Guidelines

Use this command to specify the "hello packet" advertisement interval.

Hello packets are bridge protocol data units (BPDUs) used as messages to communicate the state of the spanning tree topology. On a spanning tree, hello packets are sent by the bridge that assumes itself to be the root bridge.

Use the **set** form of this command to specify the "hello packet" advertisement interval.

Use the **delete** form of this command to restore the default **hello-time** configuration.

Use the **show** form of this command to view the **hello-time** configuration.

interfaces bridge <brx> spanning-tree max-age <interval>

Specifies how long a bridge group waits for a hello packet from the spanning tree root.

Syntax

set interfaces bridge *brx* spanning-tree max-age *interval*

delete interfaces bridge *brx* spanning-tree max-age

show interfaces bridge *brx* spanning-tree max-age

Command Default

The bridge group removes neighbor bridges at 20-second intervals.

Parameters

brx

Bridge group ID.

spanning-tree

Specifies spanning tree configuration.

max-age *interval*

Specifies the maximum age, in seconds, of received bridge BPDUs. The range is 6 through 40. The default value is 20 seconds.

Modes

Configuration mode

Configuration Statement

```
interfaces {
  bridge brx {
    spanning-tree {
      max-age interval
    }
  }
}
```

Usage Guidelines

NOTE

The configuration enforces the following relationship between the **forwarding-delay** and **max-age** spanning tree protocol timers:

$$2 * (\text{forwarding-delay} - 1 \text{ second}) \geq \text{max-age}$$

Use this command to specify the interval at which neighbor bridges are removed.

Use the **set** form of this command to specify the maximum age interval.

Use the **delete** form of this command to restore the default maximum age interval configuration.

```
interfaces bridge <brx> spanning-tree max-age <interval>
```

Use the **show** form of this command to view the maximum age interval configuration.

interfaces bridge <brx> spanning-tree priority <priority>

Specifies the forwarding priority of a bridge group in the spanning tree.

Syntax

set interfaces bridge *brx* spanning-tree priority *priority*

delete interfaces bridge *brx* spanning-tree priority

show interfaces bridge *brx* spanning-tree priority

Command Default

The priority value is 8.

Parameters

brx

Bridge group ID.

spanning-tree

Specifies spanning tree configuration.

priority

Specifies the forwarding priority of this bridge group in the spanning tree. The lower the number, the higher the priority. The range is from 0 through 15. The default value is 8.

Modes

Configuration mode

Configuration Statement

```
interfaces {
  bridge brx {
    spanning-tree {
      priority priority
    }
  }
}
```

Usage Guidelines

Use this command to specify the forwarding priority of this bridge in the spanning tree.

The spanning tree protocol uses the bridge priority to determine the spanning tree root. The lower the number assigned to the bridge group, the higher its priority, and the more likely it is to be selected as the root of the spanning tree.

Use the **set** form of this command to specify the forwarding priority of this bridge in the spanning tree.

Use the **delete** form of this command to restore the default priority configuration.

Use the **show** form of this command to view the priority configuration.

interfaces bridge <brx> spanning-tree tx-hold-count <count>

Specifies the maximum number of BPDUs that a bridge can send each second.

Syntax

set interfaces bridge *brx* spanning-tree tx-hold-count *count*

delete interfaces bridge *brx* spanning-tree tx-hold-count *count*

show interfaces bridge *brx* spanning-tree tx-hold-count

Command Default

None

Parameters

brx

The ID of a Bridge group.

count

The maximum number of BPDUs transmitted during one hello time period. The number ranges from 1 through 10.

Modes

Configuration mode

Configuration Statement

```
interfaces {
  bridge brx {
    spanning-tree {
      tx-hold-count count
    }
  }
}
```

Usage Guidelines

Use the **set** form of this command to specify the maximum number of BPDUs that a bridge can send each second.

Use the **delete** form of this command to delete the number of BPDUs that the bridge can send each second.

Use the **show** form of this command to display the number of BPDUs that the bridge can send each second.

interfaces bridge <brx> spanning-tree version <stp | rstp>

Specifies the version of the spanning tree that the bridge must use.

Syntax

set interfaces bridge *brx* spanning-tree version [stp | rstp]

delete interfaces bridge *brx* spanning-tree version { stp | rstp }

show interfaces bridge *brx* spanning-tree version

Command Default

The version of spanning tree is RSTP.

Parameters

brx

The ID of a Bridge group.

stp

Specifies that the bridge must use the STP (IEEE 802.1D) version of spanning tree.

rstp

Specifies that the bridge must use the RSTP (IEEE 802.1w) version of spanning tree.

Modes

Configuration mode

Configuration Statement

```
interfaces {
  bridge brx {
    spanning-tree {
      version stp
      version rstp
    }
  }
}
```

Usage Guidelines

Use the **set** form of this command to specify the version of spanning tree that a bridge must use.

Use the **delete** form of this command to restore to the default version of the spanning tree, which is RSTP.

Use the **show** form of this command to view the version of spanning tree for a bridge.

NOTE

The bridge reverts to STP even after the version of spanning tree is configured to RSTP on those ports where it receives STP (STP version 0) BPDUs. A port remains in this state even after the STP bridge is removed. To revert a port to RSTP mode, use the `clear bridge brx spanning-tree version` command.

monitor interfaces bridge <brx>

Monitors traffic to the vRouter.

Syntax

```
monitor interfaces bridge brx
```

Parameters

brx

Bridge group ID.

Modes

Operational mode

Configuration Statement

```
monitor interfaces bridge
```

Usage Guidelines

Use this command to monitor traffic to the vRouter and traffic forwarding.

show bridge

show bridge

Displays information about a bridge group.

Syntax

```
show bridge [ brx ]
```

Parameters

brx

The ID of a bridge group.

Modes

Operational mode

Usage Guidelines

Use this command to display information about the bridge group.

When a bridge group is not specified, the command displays information about all active bridge groups. When a bridge group is specified, the command displays information about the specified bridge group.

Examples

The following example shows how to display the details about the br0 bridge group.

```
vyatta@R$ show bridge br0
bridge name  bridge id          STP enabled  interfaces (port)
br0          8.000.52:54:00:00:01:01      yes          dp0p1s1 (2)
                                         dp0p1s2 (1)
```


show bridge <brx> macs

Displays FDB of bridge MAC address for a bridge group.

Syntax

```
show bridge brx macs
```

Parameters

brx

The ID of a bridge group.

Modes

Operational mode

Usage Guidelines

Use this command to display the FDB of bridge MAC address for a bridge group. Returned entries are sorted by MAC address. The Age column in the output displays the number of seconds since a bridge port received a packet with that source MAC address.

Examples

The following example shows how to display the FDB of MAC addresses for the br0 bridge group.

```
vyatta@R$ show bridge br0 macs
Interface (port)  MAC Address           Type  Age
dp0p1s3 (1)      12:f7:71:97:4d:43     dynamic 0
dp0p1s1 (2)      5a:d2:19:f7:f9:3d     dynamic 0
```

show bridge <brx> macs mac-address <mac-address>

show bridge <brx> macs mac-address <mac-address>

Displays from the FDB of bridge MAC addresses the record that matches the MAC address.

Syntax

show bridge *brx* **macs** **mac-address** *mac-address*

Parameters

brx

The ID of a bridge group.

mac-address

The MAC address for which information is displayed. The format of the address is *hh:hh:hh:hh:hh:hh*, where *h* is a hexadecimal number.

Modes

Operational mode

Usage Guidelines

Use this command to display from the forwarding database (FDB) of bridge MAC addresses the record that matches the MAC address. The age column in the output displays the number of seconds since a bridge port received a packet with that source MAC address.

Examples

The following example shows how to display the record from the FDB of bridge MAC addresses the record that matches the 26:ef:f7:6d:4b:5f MAC address of the br0 bridge.

```
show bridge br0 macs mac-address 26:ef:f7:6d:4b:5f
```

Interface (port)	MAC Address	Type	Age
dp0pls4 (1)	26:ef:f7:6d:4b:5f	dynamic	2

show bridge <brx> macs port <port>

Displays from the FDB of bridge MAC address the records that match a port.

Syntax

```
show bridge brx macs port port
```

Parameters

brx

The ID of the bridge group.

port

A port for which information is displayed.

Modes

Operational mode

Usage Guidelines

Use this command to display from the FDB of bridge MAC address the records that match a port. Returned entries are sorted by MAC address. The Age column in the output displays the number of seconds since a bridge port received a packet with that source MAC address.

Examples

The following example shows how to display from the FDB of bridge MAC address the records that match a port dp0p1s4 in the br0 bridge.

```
show bridge br0 macs port dp0p1s4
```

Interface (port)	MAC Address	Type	Age
dp0p1s4 (1)	26:ef:f7:6d:4b:5f	dynamic	2
dp0p1s4 (1)	72:ea:4b:ea:70:03	dynamic	10
dp0p1s4 (1)	ba:43:7f:c3:75:2c	dynamic	76

show bridge <brx> macs port <port> mac-address <mac-address>

show bridge <brx> macs port <port> mac-address <mac-address>

Displays from the FDB of bridge MAC address the records that match a bridge interface port and MAC address.

Syntax

show bridge *brx* macs *mac-address* *mac-address*

Parameters

brx

The ID of bridge group.

port

A port for which information is displayed.

mac-address

The MAC address for which information is displayed. The format of the address is *hh:hh:hh:hh:hh:hh*, where *h* is a hexadecimal number.

Modes

Operational mode

Usage Guidelines

Use this command to display from the FDB of bridge MAC address the records that match a bridge interface port and MAC address. The Age column in the output displays the number of seconds since a bridge port received a packet with that source MAC address.

Examples

The following example shows how to display from the FDB of bridge MAC address the records that match the dp0p1s4 bridge interface port and 26:ef:f7:6d:4b:5f MAC address for the br0 bridge.

```
show bridge br0 macs port dp0p1s4 mac-address 26:ef:f7:6d:4b:5f
```

Interface (port)	MAC Address	Type	Age
dp0p1s4 (1)	26:ef:f7:6d:4b:5f	dynamic	2

show bridge <brx> spanning-tree <brief>

Displays spanning tree information for a bridge group.

Syntax

```
show bridge brx spanning-tree [ brief ]
```

Parameters

brx

The ID of the bridge group.

brief

Displays a summary of spanning tree information for a bridge group.

Modes

Operational mode

Usage Guidelines

Use this command to display spanning tree information for a bridge group. Use the **brief** parameter to display a summary of the spanning tree information. You see a detailed information when you do not use the **brief** parameter.

Examples

The following example shows how to display a summary of spanning tree information for the br0 bridge group.

```
vyatta@R1$ show bridge br0 spanning-tree brief
```

```
Bridge                br0
Designated Root      8.000.52:54:00:00:01:01
Designated Root Cost 2000
Designated Root Port dp0p1s1 (2)
Bridge ID            8.000.52:54:00:00:02:01

Port                State      Role   Cost    Prio  Type  Ver
dp0p1s1 (2)        forwarding Root   2000    8     p2p   rstp
dp0p1s2 (3)        discarding Altn   2000    8     p2p   rstp
dp0p1s3 (4)        discarding Back   2000    8     p2p   rstp
dp0s8 (1)          forwarding Desg   2000    8     p2p   rstp
```

show bridge <brx> spanning-tree <brief>

The following example shows how to display a detailed output of spanning tree information for the br0 bridge group.

```
vyatta@R1$ show bridge br0 spanning-tree
```

```
br0
link enabled      yes
stp enabled       yes
version           rstp
bridge id         8.000.52:54:00:00:02:01
designated root   8.000.52:54:00:00:01:01
root port        dp0pls1 (2)
path cost        2000      internal path cost    0
max age          20        bridge max age       20
forward delay    15        bridge forward delay 15
tx hold count    6         max hops              20
hello time       2         ageing time           300
time since topology change 12931
topology change count      4
topology change            no
topology change port       dp0pls3 (1)
last topology change port  dp0pls3 (1)
```

```
br0:dp0pls1 (2)
link enabled      yes          role          Root
port id          8.002        state         forwarding
port cost        2000        admin cost    auto
designated root   8.000.52:54:00:00:01:01 dsgn cost     0
designated bridge 8.000.52:54:00:00:01:01 designated port 8.003
admin edge port  no          auto edge port no
oper edge port   no          topology change ack no
point-to-point   no          admin point-to-point no
root block       no          restricted TCN no
port hello time  2         disputed      no
bpdu guard port  no          bpdu guard error no
network port     no          BA inconsistent no
Num sent BPDU    9          Num sent TCN  5
Num rcvd BPDU    6487      Num rcvd TCN  6
Num Transition FWD 1      Num Transition BLK 0
Rcvd BPDU        none        Send RSTP     yes
```

```
br0:dp0pls2 (3)
link enabled      yes          role          Alternate
port id          8.003        state         discarding
port cost        2000        admin cost    auto
designated root   8.000.52:54:00:00:01:01 dsgn cost     0
designated bridge 8.000.52:54:00:00:01:01 designated port 8.004
admin edge port  no          auto edge port no
oper edge port   no          topology change ack no
point-to-point   no          admin point-to-point no
root block       no          restricted TCN no
port hello time  2         disputed      no
bpdu guard port  no          bpdu guard error no
network port     no          BA inconsistent no
Num sent BPDU    5          Num send TCN  0
Num rcvd BPDU    6487      Num rcvd TCN  8
Num Transition FWD 0      Num Transition BLK 0
Rcvd BPDU        none        Send RSTP     yes
```

show bridge <brx> spanning-tree bridge <brief>

Displays bridge spanning tree information for a bridge group.

Syntax

```
show bridge brx spanning-tree bridge [ brief ]
```

Parameters

brx

The ID of the bridge group.

brief

Displays a summary of spanning tree information for a bridge group.

Modes

Operational mode

Usage Guidelines

Use this command to display bridge spanning tree information for a bridge group. Use the **brief** parameter to display a summary of the spanning tree information for the bridge group. You see a detailed output when you do not use the **brief** parameter.

Examples

The following example shows how to display the spanning tree information for the br0 bridge-group.

```
vyatta@R1$ show bridge br0 spanning-tree bridge

br0
  link enabled      yes
  stp enabled       yes
  version           rstp
  bridge id         8.000.52:54:00:00:02:01
  designated root   8.000.52:54:00:00:01:01
  root port         dp0pls1 (2)
  path cost         2000          internal path cost 0
  max age           20           bridge max age     20
  forward delay     15           bridge forward delay 15
  tx hold count     6           max hops            20
  hello time        2           ageing time          300
  time since topology change 12931
  topology change count 4
  topology change   no
  topology change port dp0pls3 (1)
  last topology change port dp0pls3 (1)
```

show bridge <brx> spanning-tree bridge <brief>

The following example shows how to display a summary of spanning tree information for the br0 bridge-group.

```
vyatta@R1$ show bridge br0 spanning-tree bridge brief
```

```
Bridge                br0
Designated Root       8.000.52:54:00:00:01:01
Designated Root Cost  8000
Designated Root Port  dp0pls1 (2)
Bridge ID              8.000.52:54:00:00:02:01
```


show bridge <brx> spanning-tree port <port>

Displays spanning tree information for a bridge interface port.

Syntax

```
show bridge brx spanning-tree port port
```

Parameters

brx

Bridge group ID.

port

Specifies the port for which spanning tree information is displayed.

brief

Displays a summary of spanning tree information for a port.

Modes

Operational mode

Usage Guidelines

Use this command to display spanning tree information for a bridge interface port. Use the **brief** parameter to display a summary of the spanning tree port information. You see detailed information when you do not use the **brief** parameter .

Examples

The following example shows how to display spanning tree dpOp1s1 port information for the br0 bridge group.

```
vyatta@R1$ show bridge br0 spanning-tree port    dp0p1s1

br0:dp0p1s1 (2)
link enabled yes    role          Root
port id          8.002 state          forwarding
port cost        2000 admin co    auto
designated root 8.000.52:54:00:00:01:01 dsgn cost 0
designated bridge 8.000.52:54:00:00:01:01 designated port 8.003
admin edge port  no          auto edge port  no
oper edge port  no          topology change ack no
point-to-point  no          admin point-to-point no
root block      no          restricted TCN    no
port hello time 2 disputed no
bpdu guard port no          bpdu guard error  no
network port    no          BA inconsistent  no
Num sent BPDU   9          Num sent TCN      5
Num rcvd BPDU   6487       Num rcvd TCN      6
Num Transition FWD 1       Num Transition BLK 0
Rcvd BPDU      none        Send RSTP         yes
```


Bridge Interface Commands

- clear interfaces bridge counters..... 60
- interfaces dataplane <interface-name> bridge-group..... 61
- interfaces dataplane <interface> vif <vif-id> bridge-group..... 63
- show interfaces bridge..... 65
- monitor interfaces bridge <brx>..... 66

clear interfaces bridge counters

Clears bridge interface statistics.

Syntax

```
clear interfaces bridge [if-name] counters
```

Command Default

Statistics are cleared on all bridge interfaces.

Parameters

if-name

The identifier for the interface whose bridging counters you wish to clear. This can be any interface on which bridging is supported.

Modes

Operational mode

Usage Guidelines

Use this command to clear statistics on bridge interfaces.

If no interface is specified, then bridge statistics are cleared on all interfaces.

interfaces dataplane <interface-name> bridge-group

Adds a data plane interface to a bridge group.

Syntax

```
set interfaces dataplane interface-name bridge-group [ admin-edge | auto-edge | bpdu-guard | bridge brx | cost cost |
network-port | point-to-point status | priority priority | restrict-tcn | root-block ]
```

```
delete interfaces dataplane interface-name bridge-group [ admin-edge | auto-edge | bpdu-guard | bridge | cost | network-
port | point-to-point | priority | restrict-tcn | root-block ]
```

```
show interfaces dataplane interface-name bridge-group
```

Parameters

interface-name

The name of a data plane interface. For more information about the supported name formats of a data plane interface, refer to [Supported Interface Types](#) on page 67.

admin-edge

Sets the initial-edge state, specifying that the port connects to an end node instead of another spanning tree bridge. The default is off.

auto-edge

Allows the bridge to automatically determine the edge-port status. The default is off.

bpdu-guard

Enables the spanning tree BPDU guard. The BPDU guard is used at the network edge, where the port connects directly to an end node. The default is off.

bridge *brx*

The bridge group ID.

cost *cost*

The path cost for the interface within its bridge group. The spanning tree protocol (STP) uses this value to calculate the shortest path from this bridge group to the spanning tree root. The value can be a numerical value that ranges from 1 through 200000000 or the **auto** keyword. The default is auto. If you use the **auto** keyword, the vRouter determines the port cost from the line speed.

network-port

Enables Spanning Tree uni-directional link detection.

point-to-point *status*

Sets the point-to-point operational status to one of the following values:

- **auto**: Determines the point-to-point operational status from the duplex setting.
- **off**: Disable the point-to-point operational status.
- **on**: Enable the point-to-point operational status.

priority

The path priority for the interface within its bridge group. The range is 0 to 63. The default is 0.

restrict-tcn

Restricts propagation of topology change notifications for the spanning tree.

```
interfaces dataplane <interface-name> bridge-group
```

root-block

Restricts the ability of ports to assume the spanning tree root role.

Modes

Configuration mode

Configuration Statement

```
interfaces {
    dataplane dpxypyz {
        bridge-group {
            admin-edge
            auto-edge
            bpdu-guard
            bridge brx
            cost cost
            network-port
            point-to-point status
            priority priority
            restrict-tcn
            root-block
        }
    }
}
```

Usage Guidelines

Use this command to add a data plane interface to a bridge group, and to set the cost and priority values for the bridge on the interface.

Use the **set** form of this command to add the interface to the bridge group, or to specify cost or priority.

Use the **delete** form of this command to remove the interface from the bridge group, or to restore default values for cost and priority.

Use the **show** form of this command to view interface configuration for bridging.

interfaces dataplane <interface> vif <vif-id> bridge-group

Adds a data plane vif to a bridge group.

Syntax

```
set interfaces dataplane interface vif vif-id bridge-group admin-edge | auto-edge | bpdu-guard | bridge brx | network-port |
cost cost | point-to-point status | priority priority | restrict-tcn | root-block]
```

```
delete interfaces dataplane interface vif vif-id bridge-group [ admin-edge | auto-edge | bpdu-guard | bridge | network-port |
cost | priority | restrict-tcn | root-block]
```

```
show interfaces dataplane interface vif vif-id bridge-group
```

Parameters

interface

The name of a data plane interface. For more information about the supported name formats of a data plane interface, refer to [Supported Interface Types](#) on page 67.

vif-id

A virtual interface ID. The ID ranges from 1 through 4094.

admin-edge

Enables the Spanning Tree admin edge mode.

auto-edge

Enables Spanning Tree automatic admin edge detection.

bpdu-guard

Enables Spanning Tree Protocol PortFast Bridge Protocol Data Unit (BPDU) guard.

bridge *brx*

The bridge group ID.

cost

The path cost for the interface within its bridge group. The Spanning Tree Protocol (STP) uses this value to calculate the shortest path from this bridge group to the spanning tree root. The range is 1 to 200000000. The default is 19.

network-port

Enables Spanning Tree uni-directional link detection.

point-to-point *status*

Sets the point-to-point operational status to one of the following values:

- **auto**: Determines the point-to-point operational status from the duplex setting.
- **off**: Disable the point-to-point operational status.
- **on**: Enable the point-to-point operational status.

priority

The path priority for the interface within its bridge group. The range is 0 to 15. The default is 8.

restrict-tcn

Restricts propagation of topology change notifications for Spanning Tree.

root-block

Restricts the ability of ports to assume the Spanning Tree root role.

```
interfaces dataplane <interface> vif <vif-id> bridge-group
```

Modes

Configuration mode

Configuration Statement

```
interfaces {
    dataplane interface {
        vif vif-id {
            bridge-group {
                admin-edge
                auto-edge
                bpdu-guard
                bridge brx
                cost cost
                network-port
                point-to-point status
                priority priority
                restrict-tcn
                root-block
            }
        }
    }
}
```

Usage Guidelines

Use this command to add a data plane vif to a bridge group, and to set the supported values for the bridge on the interface.

Use the **set** form of this command to add a data plane vif to a bridge group, or to set the supported values for the bridge on the interface.

Use the **delete** form of this command to remove the interface from the bridge group, or to restore default values.

Use the **show** form of this command to view interface configuration for bridging.

show interfaces bridge

Shows bridge interface information.

Syntax

```
show interfaces bridge [bridge-group [brief] | detail]
```

Parameters

bridge-group

Displays information for the specified bridge group: one of br0 through br999.

brief

Shows a summary of information for a given bridge group.

detail

Shows detailed bridge interface information.

Modes

Operational mode

Usage Guidelines

Use this command to display information about configured bridge interfaces.

When used with no option, this command displays information about all active bridge interfaces. When the identifier of a bridge group is provided, this command displays information for the specified bridge group.

monitor interfaces bridge <brx>

monitor interfaces bridge <brx>

Monitors traffic to the vRouter.

Syntax

```
monitor interfaces bridge brx
```

Parameters

brx

Bridge group ID.

Modes

Operational mode

Configuration Statement

```
monitor interfaces bridge
```

Usage Guidelines

Use this command to monitor traffic to the vRouter and traffic forwarding.

Supported Interface Types

The following table shows the syntax and parameters of supported interface types. Depending on the command, some of these types may not apply.

Interface Type	Syntax	Parameters
Bridge	bridge <i>brx</i>	<i>brx</i> : The name of a bridge group. The name ranges from br0 through br999.
Data plane	dataplane <i>interface-name</i>	<p><i>interface-name</i>: The name of a data plane interface. Following are the supported formats of the interface name:</p> <ul style="list-style-type: none"> • dpxpyz—The name of a data plane interface, where <ul style="list-style-type: none"> — dpx specifies the data plane identifier (ID). Currently, only dp0 is supported. — py specifies a physical or virtual PCI slot index (for example, p129). — pz specifies a port index (for example, p1). For example, dp0p1p2, dp0p160p1, and dp0p192p1. • dpxemy —The name of a data plane interface on a LAN-on-motherboard (LOM) device that does not have a PCI slot, where emy specifies an embedded network interface number (typically, a small number). For example, dp0em3. • dpxsy —The name of a data plane interface on a device that is installed on a virtual PCI slot, where xy specifies an embedded network interface number (typically, a small number). For example, dp0s2. • dpxPnpyz —The name of a data plane interface on a device that is installed on a secondary PCI bus, where Pn specifies the bus number. You can use this format to name data plane interfaces on large physical devices with multiple PCI buses. For these devices, it is possible to have network interface cards installed on different buses with these cards having the same slot ID. The value of <i>n</i> must be an integer greater than 0. For example, dpOP1p162p1 and dpOP2p162p1.
Data plane vif	dataplane <i>interface-name</i> vif <i>vif-id</i> [vlan <i>vlan-id</i>]	<p><i>interface-name</i>: Refer to the preceding description.</p> <p><i>vif-id</i>: A virtual interface ID. The ID ranges from 1 through 4094.</p> <p><i>vlan-id</i>: The VLAN ID of a virtual interface. The ID ranges from 1 through 4094.</p>
Loopback	loopback <i>lo</i> or loopback <i>lon</i>	<i>n</i> : The name of a loopback interface, where <i>n</i> ranges from 1 through 99999.
OpenVPN	openvpn <i>vtunx</i>	<i>vtunx</i> : The identifier of an OpenVPN interface. The identifier ranges from vtun0 through vtunx, where <i>x</i> is a nonnegative integer.
Tunnel	tunnel <i>tunx</i> or tunnel <i>tunx</i> parameters	<i>tunx</i> : The identifier of a tunnel interface you are defining. The identifier ranges from tun0 through tunx, where <i>x</i> is a nonnegative integer.
Virtual tunnel	vti <i>vtix</i>	<i>vtix</i> : The identifier of a virtual tunnel interface you are defining. The identifier ranges from vti0 through vtix, where <i>x</i> is a nonnegative integer.

Interface Type	Syntax	Parameters
VRRP	<code>parent-interface vrrp vrrp-group group</code>	<p>Note: This interface does not support IPv6.</p> <p><i>parent-interface:</i> The type and identifier of a parent interface; for example, data plane dp0p1p2 or bridge br999.</p> <p><i>group:</i> A VRRP group identifier.</p> <p>The name of a VRRP interface is not specified. The system internally constructs the interface name from the parent interface identifier plus the VRRP group number; for example, dp0p1p2v99. Note that VRRP interfaces support the same feature set as does the parent interface.</p>

List of Acronyms

Acronym	Description
ACL	access control list
ADSL	Asymmetric Digital Subscriber Line
AH	Authentication Header
AMI	Amazon Machine Image
API	Application Programming Interface
AS	autonomous system
ARP	Address Resolution Protocol
AWS	Amazon Web Services
BGP	Border Gateway Protocol
BIOS	Basic Input Output System
BPDU	Bridge Protocol Data Unit
CA	certificate authority
CCMP	AES in counter mode with CBC-MAC
CHAP	Challenge Handshake Authentication Protocol
CLI	command-line interface
DDNS	dynamic DNS
DHCP	Dynamic Host Configuration Protocol
DHCPv6	Dynamic Host Configuration Protocol version 6
DLCI	data-link connection identifier
DMI	desktop management interface
DMVPN	dynamic multipoint VPN
DMZ	demilitarized zone
DN	distinguished name
DNS	Domain Name System
DSCP	Differentiated Services Code Point
DSL	Digital Subscriber Line
eBGP	external BGP
EBS	Amazon Elastic Block Storage
EC2	Amazon Elastic Compute Cloud
EGP	Exterior Gateway Protocol
ECMP	equal-cost multipath
ESP	Encapsulating Security Payload
FIB	Forwarding Information Base
FTP	File Transfer Protocol
GRE	Generic Routing Encapsulation
HDLC	High-Level Data Link Control
I/O	Input/Output
ICMP	Internet Control Message Protocol

Acronym	Description
IDS	Intrusion Detection System
IEEE	Institute of Electrical and Electronics Engineers
IGMP	Internet Group Management Protocol
IGP	Interior Gateway Protocol
IPS	Intrusion Protection System
IKE	Internet Key Exchange
IP	Internet Protocol
IPOA	IP over ATM
IPsec	IP Security
IPv4	IP Version 4
IPv6	IP Version 6
ISAKMP	Internet Security Association and Key Management Protocol
ISM	Internet Standard Multicast
ISP	Internet Service Provider
KVM	Kernel-Based Virtual Machine
L2TP	Layer 2 Tunneling Protocol
LACP	Link Aggregation Control Protocol
LAN	local area network
LDAP	Lightweight Directory Access Protocol
LLDP	Link Layer Discovery Protocol
MAC	medium access control
mGRE	multipoint GRE
MIB	Management Information Base
MLD	Multicast Listener Discovery
MLPPP	multilink PPP
MRRU	maximum received reconstructed unit
MTU	maximum transmission unit
NAT	Network Address Translation
NBMA	Non-Broadcast Multi-Access
ND	Neighbor Discovery
NHRP	Next Hop Resolution Protocol
NIC	network interface card
NTP	Network Time Protocol
OSPF	Open Shortest Path First
OSPFv2	OSPF Version 2
OSPFv3	OSPF Version 3
PAM	Pluggable Authentication Module
PAP	Password Authentication Protocol
PAT	Port Address Translation
PCI	peripheral component interconnect
PIM	Protocol Independent Multicast
PIM-DM	PIM Dense Mode

Acronym	Description
PIM-SM	PIM Sparse Mode
PKI	Public Key Infrastructure
PPP	Point-to-Point Protocol
PPPoA	PPP over ATM
PPPoE	PPP over Ethernet
PPTP	Point-to-Point Tunneling Protocol
PTMU	Path Maximum Transfer Unit
PVC	permanent virtual circuit
QoS	quality of service
RADIUS	Remote Authentication Dial-In User Service
RHEL	Red Hat Enterprise Linux
RIB	Routing Information Base
RIP	Routing Information Protocol
RIPng	RIP next generation
RP	Rendezvous Point
RPF	Reverse Path Forwarding
RSA	Rivest, Shamir, and Adleman
Rx	receive
S3	Amazon Simple Storage Service
SLAAC	Stateless Address Auto-Configuration
SNMP	Simple Network Management Protocol
SMTP	Simple Mail Transfer Protocol
SONET	Synchronous Optical Network
SPT	Shortest Path Tree
SSH	Secure Shell
SSID	Service Set Identifier
SSM	Source-Specific Multicast
STP	Spanning Tree Protocol
TACACS+	Terminal Access Controller Access Control System Plus
TBF	Token Bucket Filter
TCP	Transmission Control Protocol
TKIP	Temporal Key Integrity Protocol
ToS	Type of Service
TSS	TCP Maximum Segment Size
Tx	transmit
UDP	User Datagram Protocol
VHD	virtual hard disk
vif	virtual interface
VLAN	virtual LAN
VPC	Amazon virtual private cloud
VPN	virtual private network
VRRP	Virtual Router Redundancy Protocol

Acronym	Description
WAN	wide area network
WAP	wireless access point
WPA	Wired Protected Access